



# RPPL-LG-L Series

## DATA SHEET

### Outdoor Remote Power Systems

#### Features

- Complete Remote Power Solution for Off-Grid operation
- 4000+ Cycle Life @ 80% discharge LiFePO4 Lithium Batteries
- Weatherproof, UV resistant, outdoor enclosures
- Enclosures can be Wall or Pole Mounted
- Advanced battery charge controller and Embedded BMS for extended battery life

#### Applications

- Wireless Base Stations and Clients
- Wireless Bridge and Repeaters
- Remote Lighting
- Surveillance Cameras
- Remote Sensors
- Backup Power Systems



RemotePro®  
PL Series

#### Description

The RemotePro® PL-LG-L series (RPPL) outdoor power systems are designed for applications that require a primary off-grid or backup power source to run various electronics. The sealed and weatherproof 15x11x6" Polycarbonate enclosures hold up to four 12V 10AH batteries. The enclosures are hinged and gasket sealed. They can accept a padlock or tamper seal.

The enclosures can be mounted to a wall or pole with the included mounting bracket system.

The high quality solar panels have a 25year power output guarantee. The solar panels can be mounted to a 51mm to 101mm (2" to 4") diameter pole or alternately to a wall with the included bracket kit.

Features include advanced battery charge controllers with LVD load control. Some of the RPPL-LG-L systems include a controller with built in POE inserter and DCDC converter to supply 24V or 48V PoE from the 12V or 24V battery system. Other models use a 20A PWM controller with parametric LCD display. Enclosures have multiple ports for CAT5/6 cable, antenna cables/connectors or other cabling.


Batteries are an LFP (LiFePO4) Lithium type which have superb 80% deep discharge and 4000+ cycle life performance. The batteries have an embedded BMS (Battery Management System) to enable 10+ year battery life.



Solar Mount



20A PWM Controller Inside

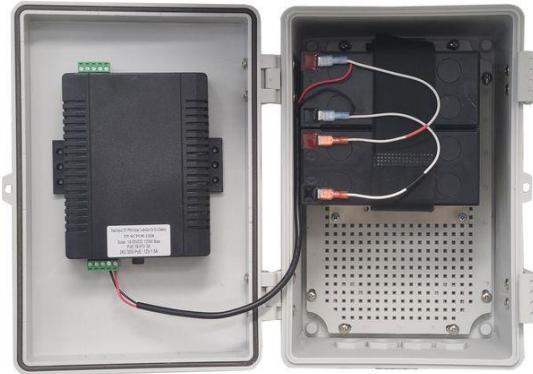

10A Solar, 30W PoE Controller Inside

## Specifications

	RPPL12-40L-35	RPPL12-40L-85	RPPL24-40L-30	RPPL1224-40L-35	RPPL1248-40L-35	RPPL2424-40L-30	RPPL2448-40L-30	RPPL1224-40L-85	RPPL1248-40L-85
<b>Passive PoE Out (30W)</b>	--	--	--	24V	48V	24V	48V	24V	48V
<b>Secondary Volts Out (DC)</b>	12V 20A	24V 20A		12V 1.5A		24V 1.5A		12V 1.5A	
<b>Battery Capacity (Amp Hrs)</b>				40Ah					
<b>Battery Voltage (DC)</b>	12V	24V	12V	24V	24V	24V	24V	12V	12V
<b>Battery Type</b>				Wide Temp LFP (LiFePO4) Lithium without heater					
<b>Battery Life</b>				10 Years					
<b>Controller Type</b>	PWM			Dual Input: Solar/POE, Dual Output: Battery Voltage/POE with DCDC Converter					
<b>Overcharge Protection</b>	14.4V	28.6V		14.4V		28.6V		14.4V	
<b>Over-discharge protection</b>	11.0V	22.0V		11.0V		22.0V		11.0V	
<b>Over-discharge recovery volts</b>	12.5V	24.5V		12.5V		24.5V		12.5V	
<b>Controller Self Consumption</b>				< 0.5W					
<b>Enclosure Type</b>				UV Protected Polycarbonate					
<b>Enclosure External Size</b>				15.7 x 12.7 x 6.7" (400 x 323 x 170mm)					
<b>Enclosure Internal Size</b>				15 x 11 x 6.5" (381 x 279 x 165mm)					
<b>Solar Panel Dims</b>	21 X 20" (540 x 510mm)	31 X 27" (780 x 678mm)		21 X 20" (540 x 510mm)				31 X 27" (780 x 678mm)	
<b>Operating Temperature</b>				-30°C to +60°C (-22°F to 140°F)					
<b>System Weight (no batteries)</b>	19lb (9kg)	24.5lb (11kg)			19lb (9kg)			24.5lb (11kg)	
<b>Battery Weight</b>				8.8lb (4kg)					
<b>Wind Speed Rating</b>				110MPH (49m/s)					
<b>Warranty</b>				3 Years					

## System Ordering:

Model #	Continuous Power Generation*	Reserve Time	Enclosure Type	Battery Voltage	PoE Output Voltage	Battery Capacity	Solar Panel Size
RPPL12-40L-35	7.5W	48hrs	Polycarbonate	12VDC	---	40Ah	35W
RPPL12-40L-85	15W	24hrs	Polycarbonate	12VDC	---	40Ah	85W
RPPL24-40L-30	6.5W	55hrs	Polycarbonate	24VDC	---	40Ah	30W
RPPL1224-40L-35	7.5W	48hrs	Polycarbonate	12VDC	24V	40Ah	35W
RPPL1248-40L-35	7.5W	48hrs	Polycarbonate	12VDC	48V	40Ah	35W
RPPL2424-40L-30	6.5W	55hrs	Polycarbonate	24VDC	24V	40Ah	30W
RPPL2448-40L-30	6.5W	55hrs	Polycarbonate	24VDC	48V	40Ah	30W
RPPL1224-40L-85	15W	24hrs	Polycarbonate	12VDC	24V	40Ah	85W
RPPL1248-40L-85	15W	24hrs	Polycarbonate	12VDC	48V	40Ah	85W

\*6hrs peak sun

**Note:** The Wide Temp Lithium batteries used in these systems are designed for operation in -30C to +60C environments making them perfect for year round outdoor use in all climates

For further information contact:

[Tyconsystems.com](http://Tyconsystems.com)

