




ENC-STL-24x24x16 Qwik Install

STEP 1: Prepare the enclosure: Install just the top mounting bracket to the enclosure using two 8mm bolts.


NOTE: It takes two people to mount the enclosure to a pole. The standard U-Bolt mounting accommodates a pole up to 4" diameter. Multiple pole straps can be used for extra strength. Pole straps are available for poles up to 11" diameter or larger.

STEP 2: Install the bottom bracket and stabilizer bracket to the pole using the U-Bolt and/or Pole Straps. The stabilizer bracket is used as an aid to mounting and additional support when mounted.

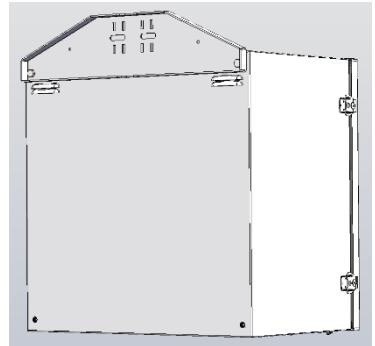


STEP 3: Lift the enclosure and place it on the stabilizer bracket. Connect the top bracket to the pole using U-Bolt and/or Pole Straps.

STEP 4: Attach The two 8mm bolts that hold the bottom bracket to the enclosure. Make sure all bolts are tight. (8-15 ft lbs)

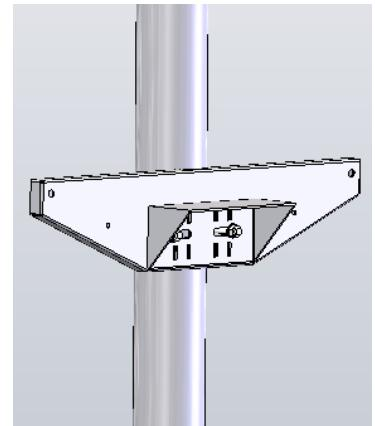

STEP 5: Install the three wire feedthru cable glands in the holes in the bottom of the enclosure. If one or more of the cable glands will not be used, just cut a short piece of wire and tighten in the cable gland.

STEP 6: The fan included in the enclosure runs on 12VDC or 24VDC. It is thermostatically controlled to only turn on when the temperature exceeds 45C. The fan airflow direction can be reversed, as desired, by unmounting and remounting with opposite orientation.

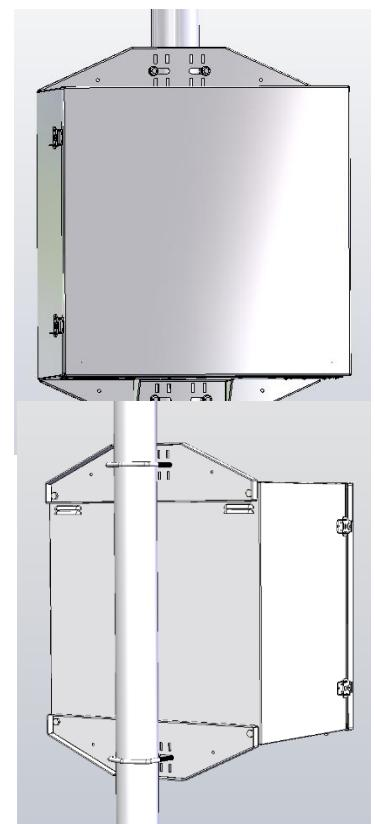

NOTE: The bottom plate can be removed from the enclosure if you need to add some additional feedthru. (ex; conduit connection)

